Distinction





The perfect combination of performance and design

A contemporary fireplace overtaking your entire range of vision with elegance and style

Customization

From the heat distribution kit all the way to the Invisimesh screen, the Distinction series offers endless options to tailor your fireplace to your space.

Our Guarantee

Rest assured our uncompromising quality and long-term reliability is backed by our limited 10-year warranty.

Versatility

The Distinction adds tranquility and warmth to your home. Your desired media can completely cover the bed of the firebox, enhancing the ambience even when the fireplace is not in use.






Distinction D Series

The Distinction offers a wide scope of luxury with ample viewing area while maintaining a 181/2" framing depth. You won't have to sit close to the Distinction to feel the heat, as it features standard circulating fans to warm any space. You can enjoy a more gentle flame and heat with the 30% turndown, and a 50% turndown for the D63. The unit also comes standard with reflective ceramic glass liners, multi color LED uplighting, ceramic glass and a full function remote.



Distinction DL Series

A simplified version of the D Series, the DL Series has the same proportions to add personality to any space. The DL ambitiously features a concealed linear burner and a non intrusive invisimesh screen. Any options that are standard to the fully loaded D Series can be added to the DL, giving you complete freedom to customize and match to your space.

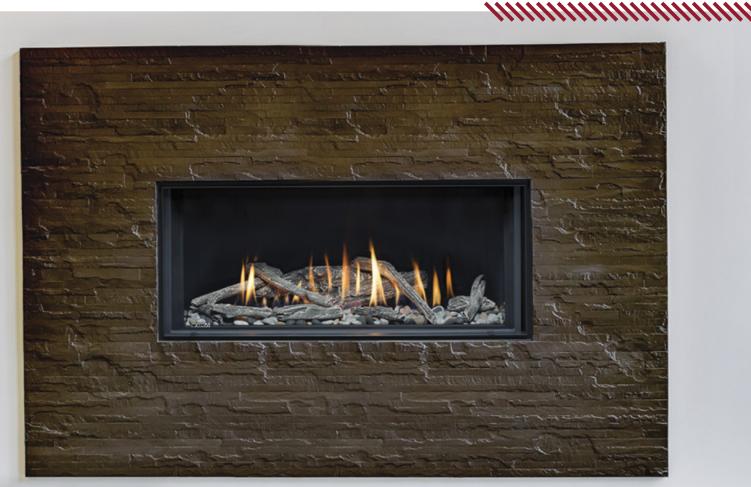


Distinction D3615 with NG Flame (shown with speckled stones and driftwood

Distinction Cool Wall Advantage

Elegance & heat, exactly where you want it.

Diverting heat away from the wall, keeping your tv or artwork safe.



190°F / 87°C Heat Vent

Heat is diverted through the Cool Wall Advantage kit, safely bypassing the space above the fireplace.

100°F / 38°C Cool Wall*

Wall temperature is cool, creating an area safer for mounting a TV, or hanging artwork.

550°F / 287°C Glass

Reduced glass temperature, combined with the provided screen creates a safe viewing area.

* 100°F / 38°C temperature taken at 30" above fireplace opening



Burner Media & Accessories



www.montigo.com

Distinction D-Series Standard Features:

- Full load Proflame 2 control system and full function remote control
- Montigo 4th generation linear concealed burner
- 30% turn down gas valve with stepper motor, 50% turn down for D6315
- Neoceram high temperature glass door with flush safety screen
- · Field convertible to propane with optional conversion kit
- Quiet circulating fans with remote speed adjustment
- · Ceramic glass reflective liner kit
- Multicolor LED uplighting with remote control
- Star Ice fireglass burner media

Distinction DL6315 Standard Features:

- Basic Proflame2 Control System with 14' wall switch wire
- Montigo 4th generation linear concealed burner
- Single stage gas valve
- Neoceram high temperature glass door with flush safety screen
- · Field convertible to propane with optional conversion kit
- Star Ice fireglass burner media

Distinction D-Series Options:

Cool Wall Advantage Kit

Distinction DL6315 Options:

- 30% turn down valve with stepper motor
- Full function remote control
- · Ceramic glass reflective liner kit
- Multicolor LED uplighting with remote control
- Cool Wall Advantage Kit





Distinction Series Components & Efficiency

Universal Components

	Order Code	Description
Standard Media	HW1157	Star Ice fireglass as supplied
Full Load Upgrade Kit-NG	RX300NG	30% Turn Down , Control Module and Remote Control for DL
Full Load Upgrade Kit-LP	RX300LP	30% Turn Down , Control Module and Remote Control for DL
Conversion Kit	GCA008	Natural Gas to Propane Conversion Kit (DL)
Conversion Kit	GCA009	Natural Gas to Propane Conversion Kit (D)

BTU and efficiency listing

	В	BTU		
Unit Code	High	Low	P.4. 1-15	
D3615NI	35,000	23,000	63%	
D3615LI	35,000	28,000	63%	
D4815NI	40,000	28,000	67%	
D4815LI	40,000	36,000	67%	
D6315NI	50,000	27,000	50%	
D6315LI	50,000	26,700	52%	
DL6315NI	40,000	40,000	55%	
DL6315LI	40,000	40,000	53%	
D7215NI	57,000	39,000	63%	
D7215LI	57,000	46,000	65%	

D36" Components

	Order Code	Description		
Models	D3615NI-2	Single sided model equipped with Proflame 2 IPI NG		
Models	D3615STNI-2	See through model equipped with Proflame 2 IPI NG		
	RR150SS	Designer Speckled Stones		
	LGS59	- D3615 Single Sided Driftwood logset		
Optional	LGS60			
Media Types	LGS59 x2	D3615ST See Through Driftwood logset		
_	N/A	See media page for optional fireglass and firestone selection		
Cool Wall	HDKPD36	Cool Wall Advantage Kit		
Advantage	HDKPDFK-1	Cool Wall Advantage 5" flex liner		

Order Code	Description			
D4815NI-2	Single sided model equipped with Proflame 2 IPI NG			
D4815STNI-2	See through model equipped with Proflame 2 IPI NG			
RR150SS	Designer Speckled Stones			
LGS57	D4815 Single Sided Driftwood logset			
LGS59				
LGS61				
LGS59 x2	D4815ST See Through Driftwood logset			
N/A	See media page for optional fireglass and firestone selection			
HDKPD48	Cool Wall Advantage Kit			
HDKPDFK	Cool Wall Advantage 5" flex liner			
	D4815NI-2 D4815STNI-2 RR150SS LGS57 LGS59 LGS61 LGS59 x2 N/A HDKPD48			

D63" Components


	Order Code	Description		
	D6315NI-2	Single sided model equipped with Proflame 2 IPI NG		
Models	DL6315NI	Single sided model equipped with Proflame 2 BASIC IPI NG		
wodels	D6315STNI-2	See through model equipped with Proflame 2 IPI NG		
	DL6315STNI	See through model equipped with Proflame 2 BASIC IPI NG		
Reflective	RBGD63	Reflective Glass Kit for single sided		
Glass Kit	RBGD36ST	Reflective Glass Kit for see through		
	RR450SS	Designer Speckled Stones		
- ··· ·	LGS58	D6315 and D6315ST Driftwood Logset		
Optional • Media Types	LGS59	[installation requires both logsets]		
	N/A	See media page for optional fireglass and firestone selection		
Fan kit	DFK-3	DL Circulating Fan Kit		
LED Light Kit	MCLEDDL63	DL Multicolor LED Light Kit w/Remote		
Cool Wall	HDKPD63	Cool Wall Advantage Kit		
Advantage	HDKPDFK	Cool Wall Advantage 5" flex liner		

D72" Components

D48" Components


	Order Code	Description			
Models	D7215NI-2	Single sided model equipped with Proflame 2 IPI NG			
Models	D7215STNI-2	See through model equipped with Proflame 2 IPI NG			
	RR450SS	Designer Speckled Stones			
	LGS57				
	LGS58	D7215 Single Sided Driftwood logset [installation requires all 3 logsets]			
Optional	LGS59				
Media Types	LGS58	D7215ST See Through Driftwood Logset			
	LGS59	[installation requires both logsets]			
_	N/A	See media page for optional fireglass and firestone selection			
Cool Wall	HDKPD72	Cool Wall Advantage Kit			
Advantage	HDKPDFK	Cool Wall Advantage 5" flex liner			

Cool Wall Advantage Dimensions

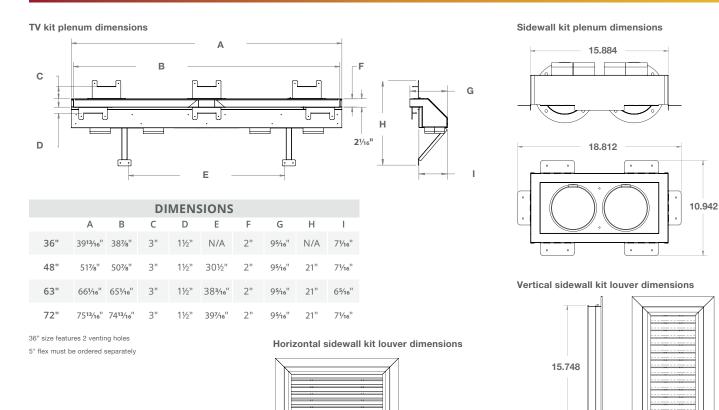


15.748



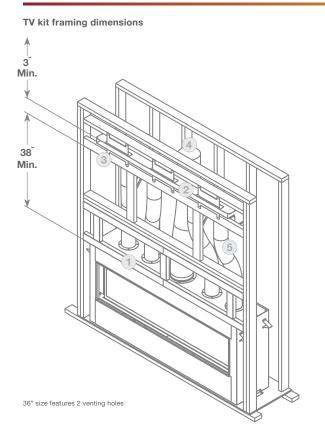

Sidewall kit framing dimensions


-7.874-

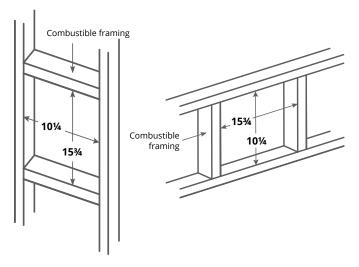

7.874


- 1 Non combustible framing
- 2 Cool Wall Advantage opening
- 3 2x4 on edge
- 4 Main vent
- 5 5" venting

Distinction Series Dimensions

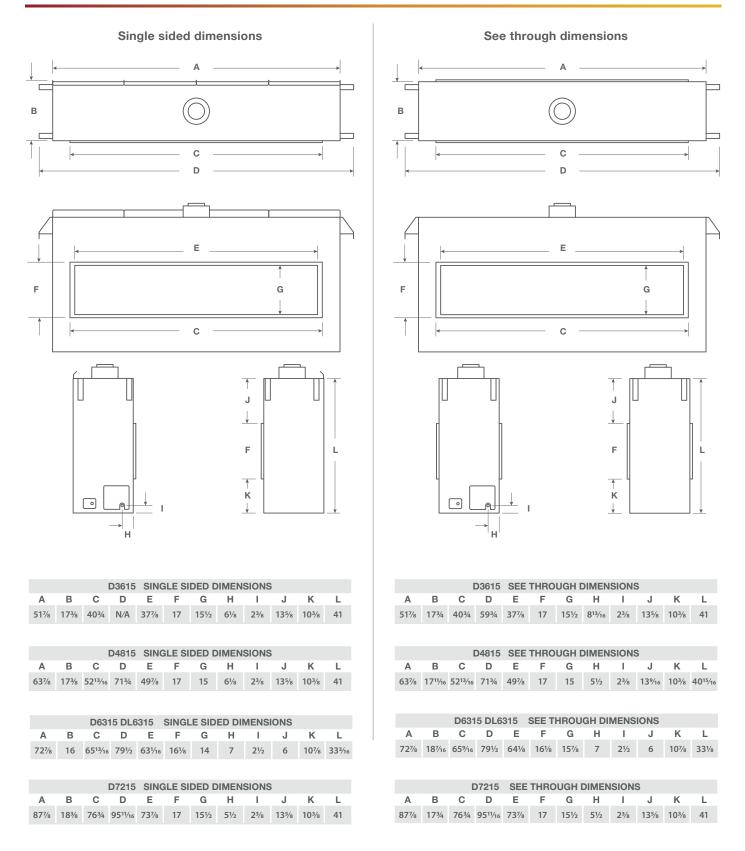

Distinction Series Framing Dimensions

Single sided dimensions

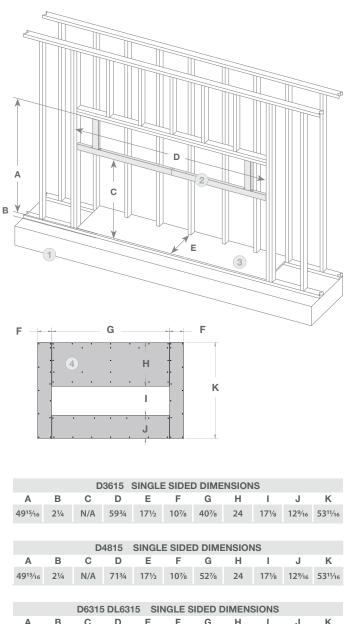


Α	В	С	D	E	F	G	Н	1	J	K
50 ³ / ₈	21⁄4	3311/16	79 ½	18	81⁄8	661⁄/8	245/8	16½	13	541/8

D7215 SINGLE SIDED DIMENSIONS											
	Α	в	С	D	E	F	G	н	1	J	κ
	59 ³ / ₈	21⁄4	411⁄16	95 ¾	18½	101/8	761/8	337⁄16	171⁄8	121/16	631/8

36" and 48" version does not include non combustible framing kit

Chase venting is needed for safe operation of the unit, see instruction manual for detailed instructions Minimum distance from unit base to ceiling is 89"

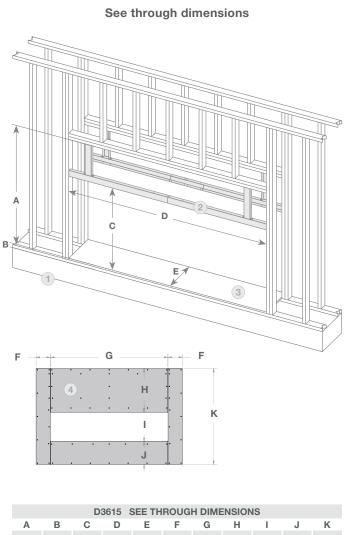

	-	-			· ·			· ·	-			
49 ¹⁵ / ₁₆	21⁄4	N/A	59 ¾	17 ¹ / ₁₆	101/8	401/8	24	171⁄8	121/16	53 ¹ / ₁₆		
D4815 SEE THROUGH DIMENSIONS												
А	В	С	D	Е	F	G	Н	1	J	К		
49 ¹⁵ / ₁₆	21⁄4	N/A	71¾	17 ¹¹ /16	101/8	521/8	24	171/8	12%16	53 ¹¹ /16		
		D6315	DL631	5 SE	E THR	DUGH I	DIMEN	SIONS				
Α	В	С	D	E	F	G	Н	I	J	K		
50 ³ /8	21⁄4	3311/16	79 ½	187⁄16	81/8	661/8	245/8	16½	13	541/8		
		D7	215	SEE TH	IROUG	H DIMI	ENSION	NS				
۸	B	0	D	E	E	G	н	1	1	к		

DI215 SEE INROUGH DIMENSIONS										
Α	в	С	D	E	F	G	н	1	J	K
59 ³ / ₈	21⁄4	411/16	95 ¾	1711/16	101/8	761/8	337/16	171⁄8	121/16	631/8

See though version includes two sets of non combustible framing and concrete board.

36" and 48" version does not include non combustible framing kit

Chase venting is needed for safe operation of the unit, see instruction manual for detailed instructions Minimum distance from unit base to ceiling is 89"

Distinction



Consult the owner's manual for complete installation instructions, product dimensions and proper clearances to combustible surfaces prior to installing fireplace. All specifications, framing dimensions, product designs, materials and colors are subject to change without notice. The actual flame pattern and color may vary slightly from the illustrations. Diagrams and illustrations are not to scale. Options & accessories may have associated surcharge.

Some materials used in the manufacturing process of this product can expose you to Benzene which is known in the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov Available at:









the art of fireplaces

P/N XB2213